


Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

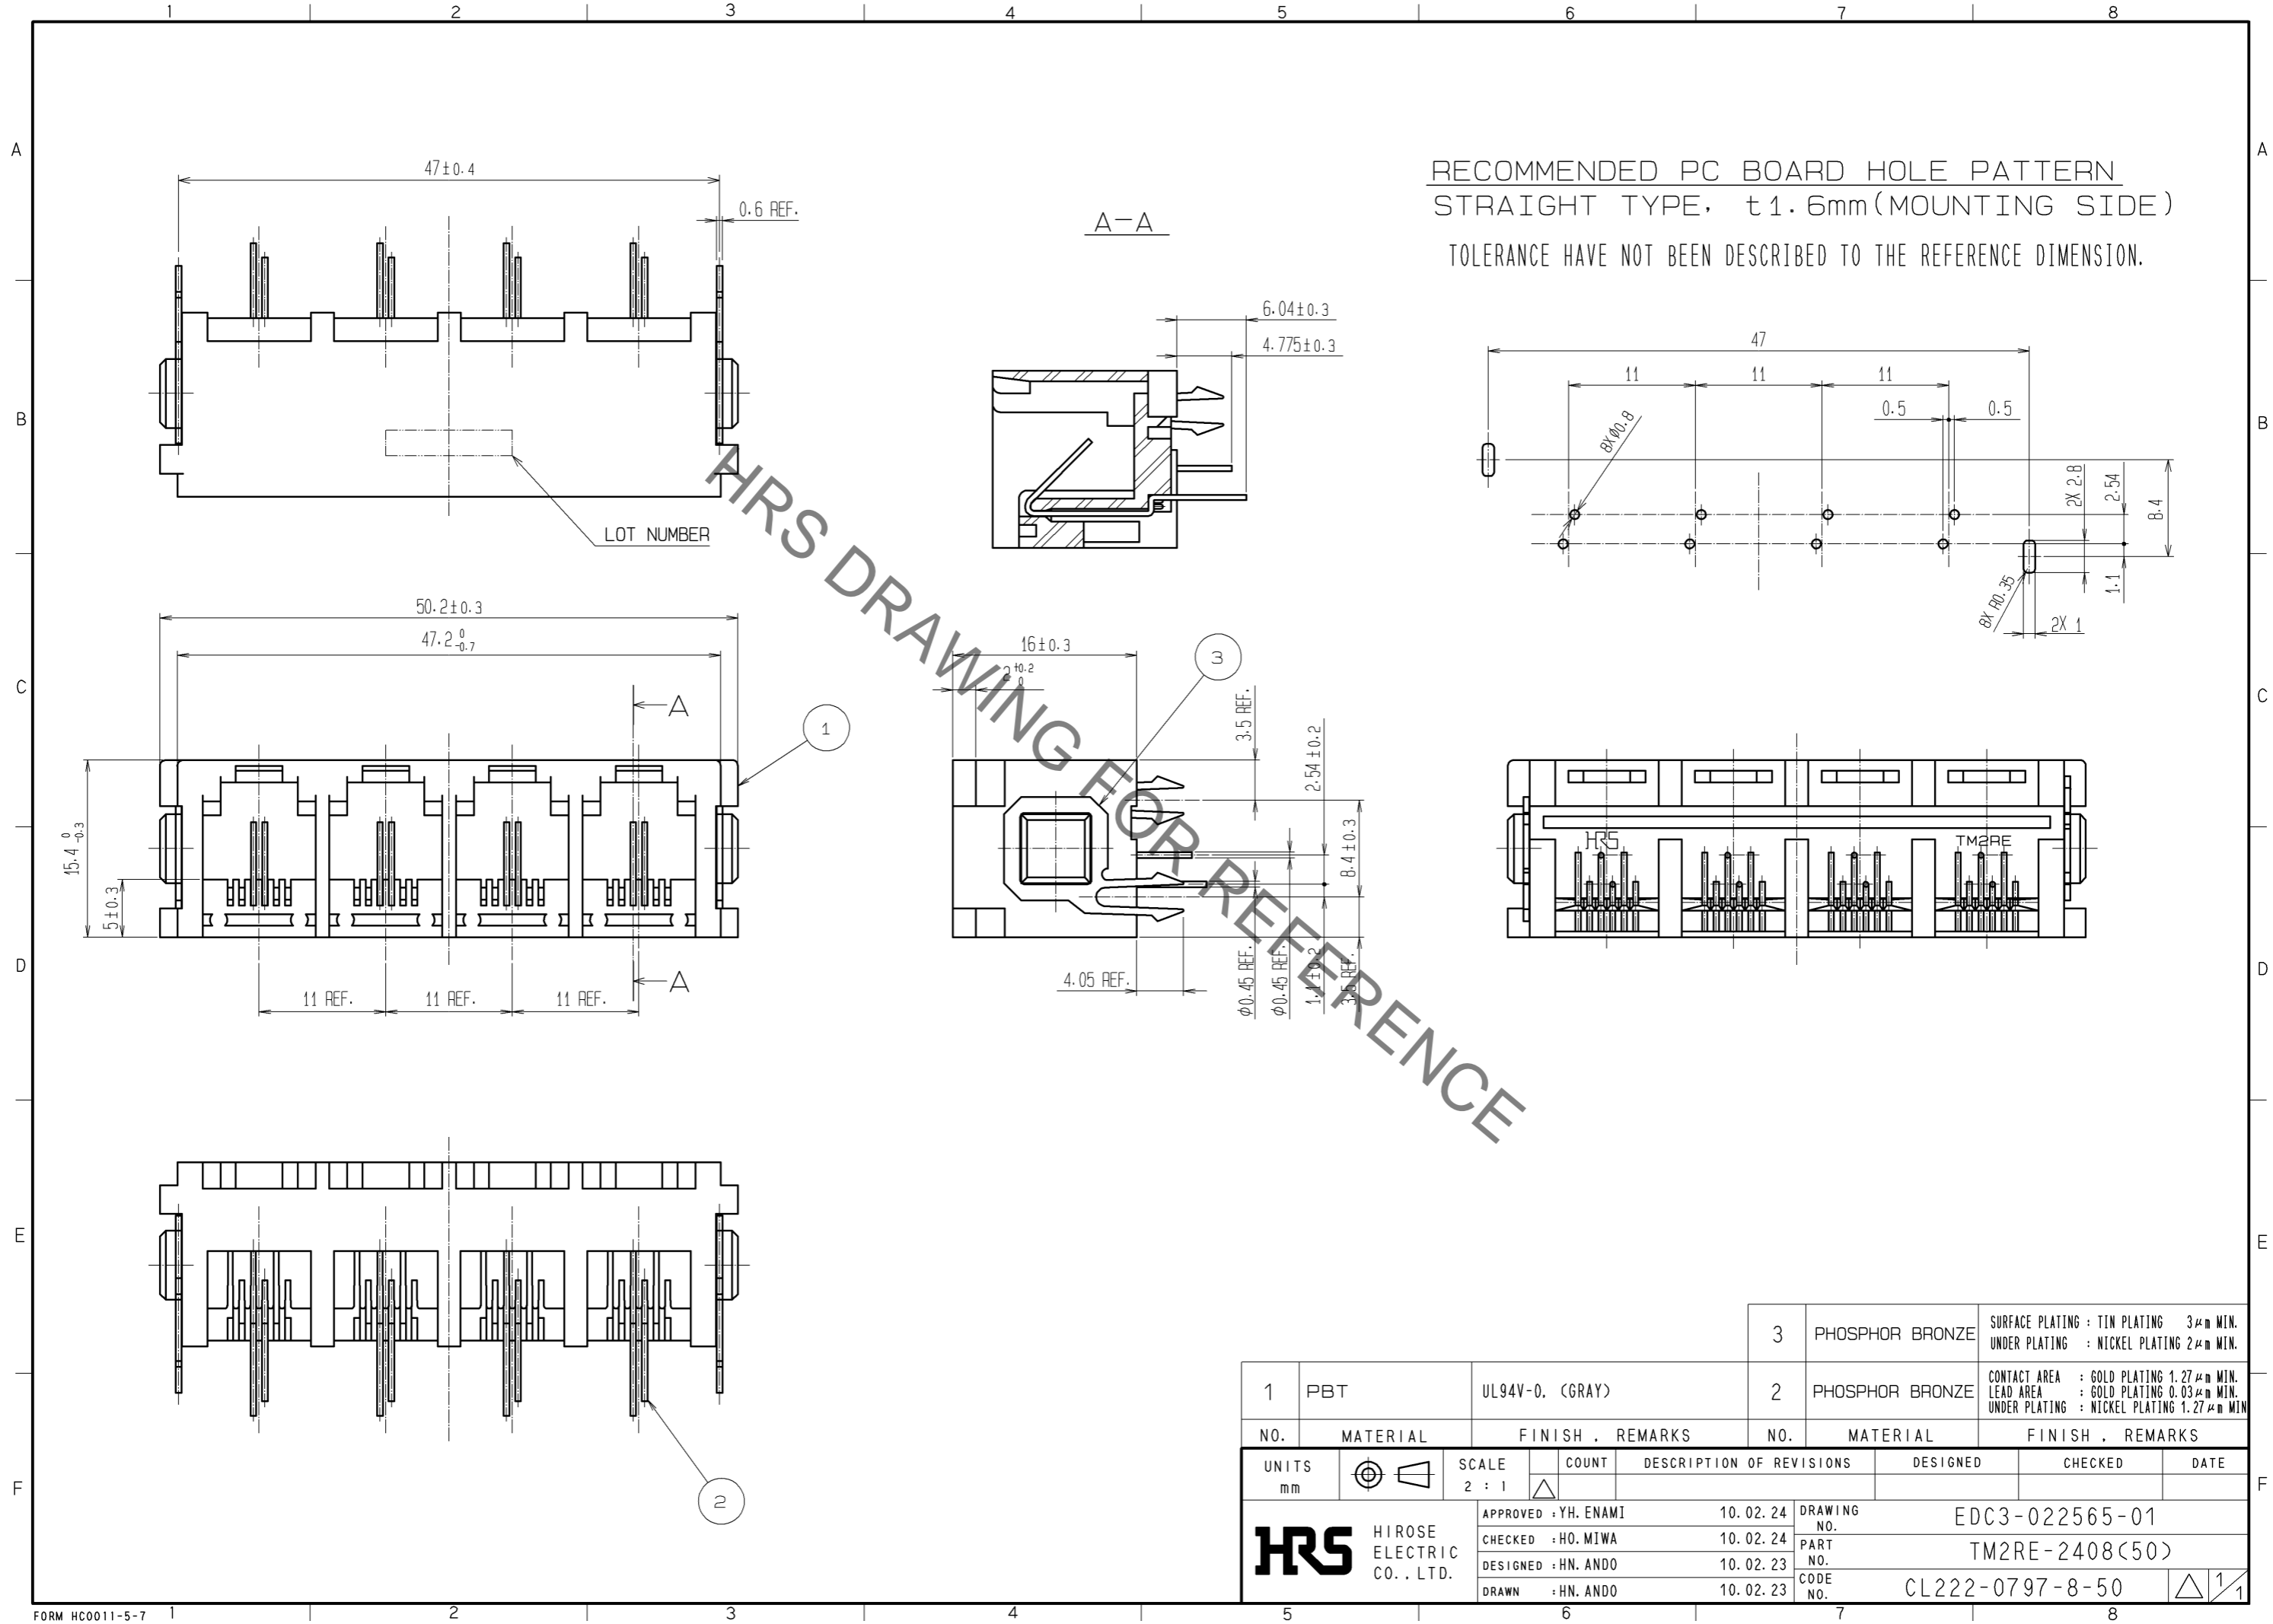

RECOMMENDED PC BOARD HOLE PATTERN
STRAIGHT TYPE, t1.6mm(MOUNTING SIDE)
TOLERANCE HAVE NOT BEEN DESCRIBED TO THE REFERENCE DIMENSION.

1	PBT	UL94V-0. (GRAY)	3	PHOSPHOR BRONZE	SURFACE PLATING : TIN PLATING 3μm MIN. UNDER PLATING : NICKEL PLATING 2μm MIN.
2	PHOSPHOR BRONZE		2	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 1.27μm MIN. LEAD AREA : GOLD PLATING 0.03μm MIN. UNDER PLATING : NICKEL PLATING 1.27μm MIN.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1		DESIGNED	CHECKED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : YH. ENAMI	10.02.24	DRAWING NO. EDC3-022565-01	
		CHECKED : HO. MIWA	10.02.24	PART NO. TM2RE-2408(50)	
		DESIGNED : HN. ANDO	10.02.23	CODE NO. CL222-0797-8-50	
		DRAWN : HN. ANDO	10.02.23	DATE	