


PAIR	CONSIST OF:
BTO-26732-D55	(2) BTO-26740-D55

FREQUENCY	TEST TYPE	RANGE OF DEVIATION BETWEEN MICROPHONES	UNITS
1 kHz	SENSITIVITY	2.0 MAX.	dB
200 Hz	PHASE	1.5 MAX.	DEGREES
5000 Hz	PHASE	5.0 MAX.	DEGREES
7000 Hz	SENSITIVITY	1.0 MAX.	dB

3 >>> SHOWS MICROPHONE WITH GREATER RESPONSE PHASE VALUE AT 200 Hz.

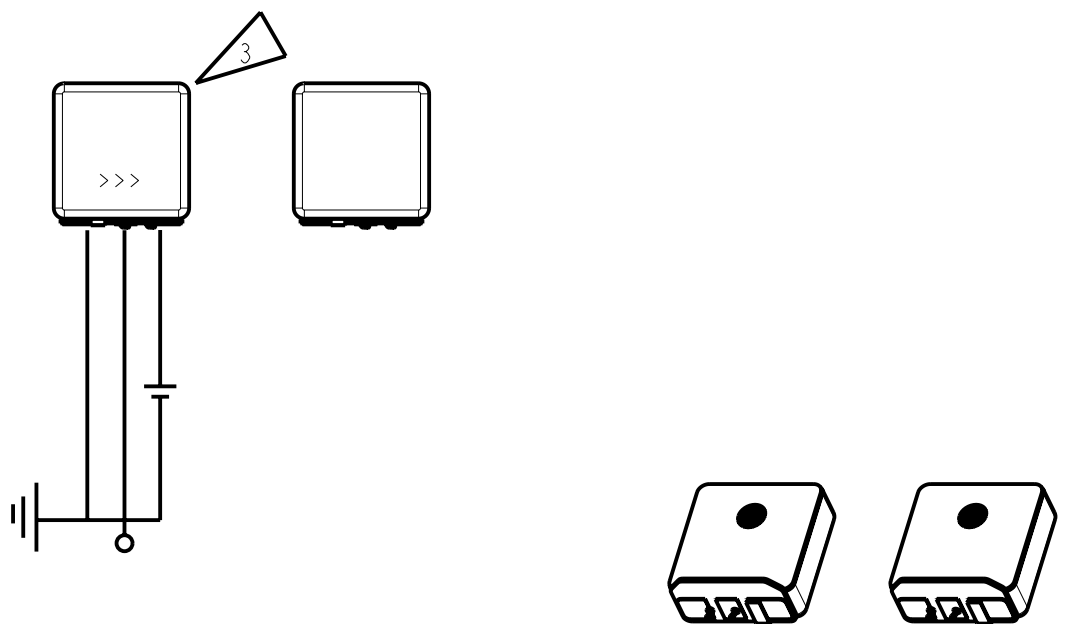

Revision	C.O. #	Implementation Date	RELEASE LEVEL	REVISION
C	MI0101428	4-23-07	Released	C
B	MI0101231	9-14-06		
A	MI0100999P	1-17-06		
WHEN TEST LIMITS ARE USED TO ESTABLISH INCOMING INSPECTION ACCEPTANCE/REJECTION CRITERIA, CORRELATION OF TEST EQUIPMENT WITH KNOWLES IS ALSO REQUIRED FOR ELIMINATION OF EQUIPMENT AND TEST METHOD VARIATION			DR. BY	DATE
			MMM	1-17-06
			CK. BY	DATE
			GJP	1-19-06
			APP. BY	DATE
			GJP	1-19-06

KNOWLES ELECTRONICS
ITASCA, ILLINOIS U.S.A.