
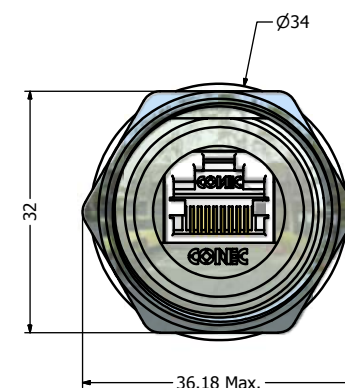
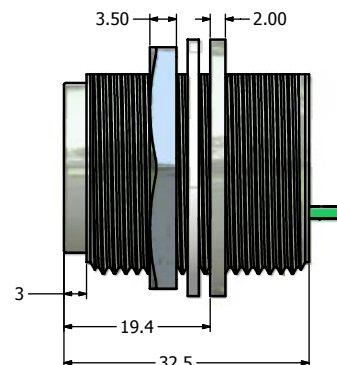
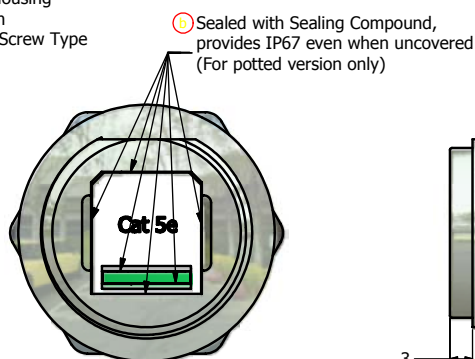
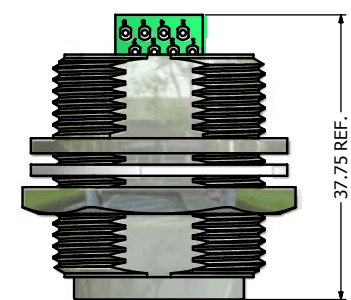
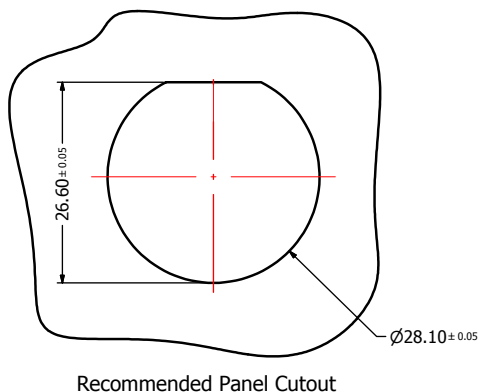


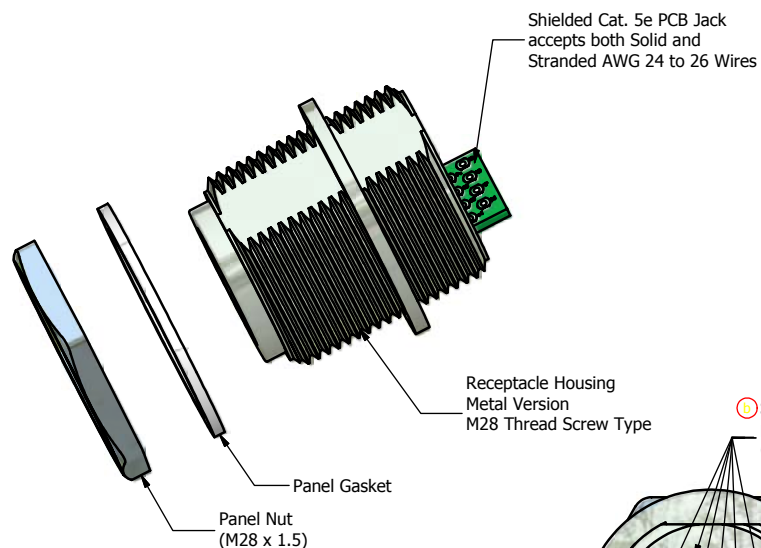

Notes:

- Electrical Specifications:
 - Meets EIA/TIA-568-B.2 Cat.5e Specification
 - Contact Resistance: 20mOhm max.
 - Insulation Resistance: 500MOhm min. @ 100 VDC
 - Current Rating: 1.2A max. at 25° C
 - Working Voltage: 100 VDC
 - DWV: 1000 VDC/60s Contact to Contact, 1500 VDC/60s Contact to Metal Shell
 - Operating Temperature: -40° C to +85° C
- Material and Finish:
 - Receptacle Housing: Brass, Nickel Plated
 - Panel Nut: Brass, Nickel Plated
 - Panel Gasket: Silicone, Color: White
 - RJ45 PCB Jack Metal Shell: Copper Alloy, Nickel Plated
 - RJ45 PCB Jack Plastic Housing: Glass filled PBT UL94 V-0, Color: Black
 - RJ45 PCB Jack Contacts: Phosphor Bronze, Finish: 50u" Gold min. over Nickel
- Connector can be front or rear mounted to a maximum panel thickness of 3.2mm.
- RoHS compliant

Directive 2002/95/EC
"RoHS"
Compliant

Description	Part Number
Metal Version with Shielded RJ45 PCB Jack	17-101594
Potted Metal Version with Shielded RJ45 PCB Jack	17-101634

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC CORPORATION	Customer:			Tolerance Unless otherwise specified 0 P/LC ±0.50 1 P/LC ±0.38 2 P/LC ±0.25 3 P/LC ±0.10 ANGLES ±3°				Scale: 1.5:1		Dim. in mm		
	Name		Title	Approval Date		Autodesk Inventor		Material: See Notes				
						2009	Date	Name		Title: Receptacle Assembly Kit		
						Draw.	Jun. 03	Vincent Ke		with Shielded Cat. 5e RJ45 IDC Jack		
						Appd.	Jun. 03	J. Chaudry		Metal Version		
						Norm						
						D-old						
	b		Aug/26/09	Vincent Ke			Drawing No.: 17K1A248				DIN A3	
	a	original					Part No.: SEE P/N TABLE				Sheet 1/1	
	Rev.	Changes	Date	Name								