

Product data sheet

Specifications

SQUARE D



Timing Relay, Type JCK, plug In, on delay, programmable, 0.5 second to 999 hours, 10A, 240 VAC, 120 VAC/110 VDC

9050JCK60V20

Product availability: Stock - Normally stocked in distribution facility

Main

product range	9050JCK
product type	Timer
timing mode	On-delay
timing range	0.1...99.9 s 1...999 s 0.1...99.9 min 0.05...9.99 s 0.1...99.9 h 1...999 h
supply voltage	120 V AC

Complementary

power consumption	3 VA
current rating	10 A
switch function	DPDT
contact composition	2 NO + 2 NC
contact material	Silver nickel
maximum switching voltage	240 V AC
mounting type	Socket
number of pins	8
shape of pins	Tubular
for use with	8501NR51 8501NR52

Environment

certifications	CE UL Recognized UL Listed
ambient temperature range - operational	-28...66 °C (-18...150 °F)
Height	2.4 in (60 mm)
Width	1.7 in (44 mm)
Depth	3.6 in (91 mm)

Ordering and shipping details

Category	US10CP221652
----------	--------------

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	0CP2
GTIN	785901053866
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	1.90 in (4.826 cm)
Package 1 Width	2.60 in (6.604 cm)
Package 1 Length	4.40 in (11.176 cm)
Package weight(Lbs)	4.800 oz (136.078 g)
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Height	4.50 in (11.43 cm)
Package 2 Width	10.00 in (25.4 cm)
Package 2 Length	11.00 in (27.94 cm)
Package 2 Weight	5.501 lb(US) (2.495 kg)
Unit Type of Package 3	PAL
Number of Units in Package 3	600
Package 3 Height	40.00 in (101.6 cm)
Package 3 Width	40.00 in (101.6 cm)
Package 3 Length	48.00 in (121.92 cm)
Package 3 Weight	165.0007 lb(US) (74.843 kg)

Contractual warranty

Warranty	18 months
----------	-----------

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing "Use Better, Use Longer, Use Again" campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	50
--	----

Use Better

Materials and Substances

Packaging made with recycled cardboard	No
--	----

Packaging without single use plastic	No
--------------------------------------	----

[EU RoHS Directive](#)

Pro-active compliance (Product out of EU RoHS legal scope)



Use Again

Repack and remanufacture

Take-back	No
-----------	----




Dimensions Drawings

Approximate Dimensions

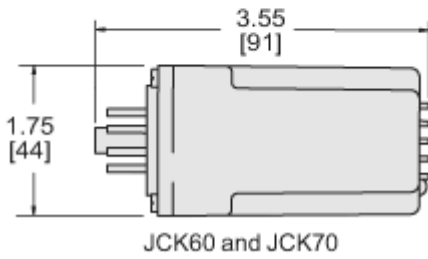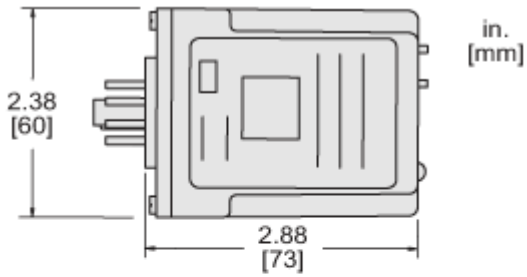

Connections and Schema

Connections and Wiring Diagrams

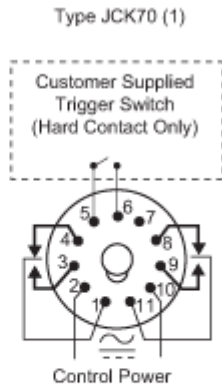

(1) Do not apply DC voltage to the 240 Vac timers (voltage code V24).

Image of product / Alternate images

Alternative



